TECHNICAL DATA

REGUPOL SONUS CURVE 17

Product
High performance impact and airborne sound insulating underlayment for various floor structures under screed beds and floating floors.

Material
- PUR-bonded recycled rubber fibres
- Dimpled profile on the underside

Weight
7.2 kg/m²

Dimensions
Length: 10,000 mm, Width: 1,250 mm, Thickness: 17 mm

Applications
Under cement or gypsum screed beds, concrete or timber toppings and other floating floor solutions for both residential and commercial use, e. g. cinemas, theatres or mechanical rooms.

Certification
GreenCircle certified for recycled content and can potentially qualify for up to 8 LEED points.

Acoustical Performance*	Standard	Result
Under screed:		
45 mm anhydrite screed, **REGUPOL sonus curve 17,** 140 mm concrete slab	DIN EN ISO 10140-3 DIN EN ISO 717-2 ASTM E492-09 ASTM E989-06	$\Delta L_w \geq 28$ dB IIC 64 (ΔIIC 29)
	DIN EN ISO 10140-1 DIN EN ISO 717-1 ASTM E413-10 ASTM E90-09	R_w 63 dB STC 64
Under timber:		
19 mm T&G timber bonded to 18 mm Yellow Tongue plywood bonded to **REGUPOL sonus curve 17,** 170 mm concrete slab	ISO 10140-3 ISO 717-2 (Indicative results only) ASTM E492-09 ASTM E989-06	$L_{n,w}$ = 53 dB ΔL_w = 27 dB IIC 55
Under concrete:		
38 mm concrete topping, **REGUPOL sonus curve 17,** OSB raft system with sand on 131 mm CLT ceiling	ASTM E492-09 ASTM E989-06	IIC 60
	ASTM E413-10 ASTM E90-09	STC 66

*Assembly from top to bottom

TECHNICAL DATA

REGUPOL SONUS CURVE 17

Material properties	Standard	Result
Maximum surface load		50 kN/m²
Mean dynamic stiffness value	DIN EN 29052-1	$s'_t \leq 15$ MN/m³
Compressibility	DIN EN 12431	c ≤ 2 mm

Thermal behaviour	Standard	Result
Thermal conductivity	DIN EN 12667	λ = 0.075 W/(mK)
Thermal resistance	DIN EN 12667	R = 0.167 (m²K)/W
Temperature resistance		-20 to +60° C

Fire behaviour	Standard	Result
Fire classification	DIN EN 13501-1	E

Health protection	Standard	Result
VOC	DIN EN 16516	compliant with EU-LCI list and German AgBB scheme; "A+" as per décret n°2011-321
Nitrosamine	DIK Method	compliant with German Model Building Regulation
PAH	DIN EN 18287	compliant with German Model Building Regulation

Physical data - Deflection

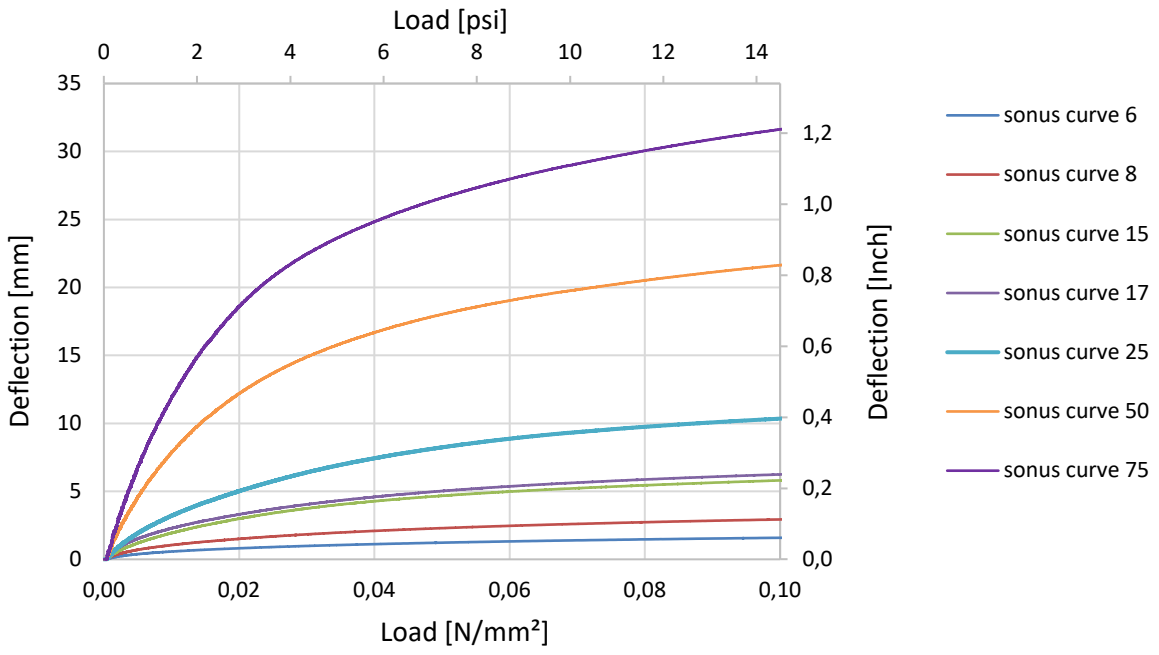

Test results as per test report 07-2019 conducted by Technical University of Dresden, Germany

TECHNICAL DATA

REGUPOL SONUS CURVE 17

Physical data – Natural frequency

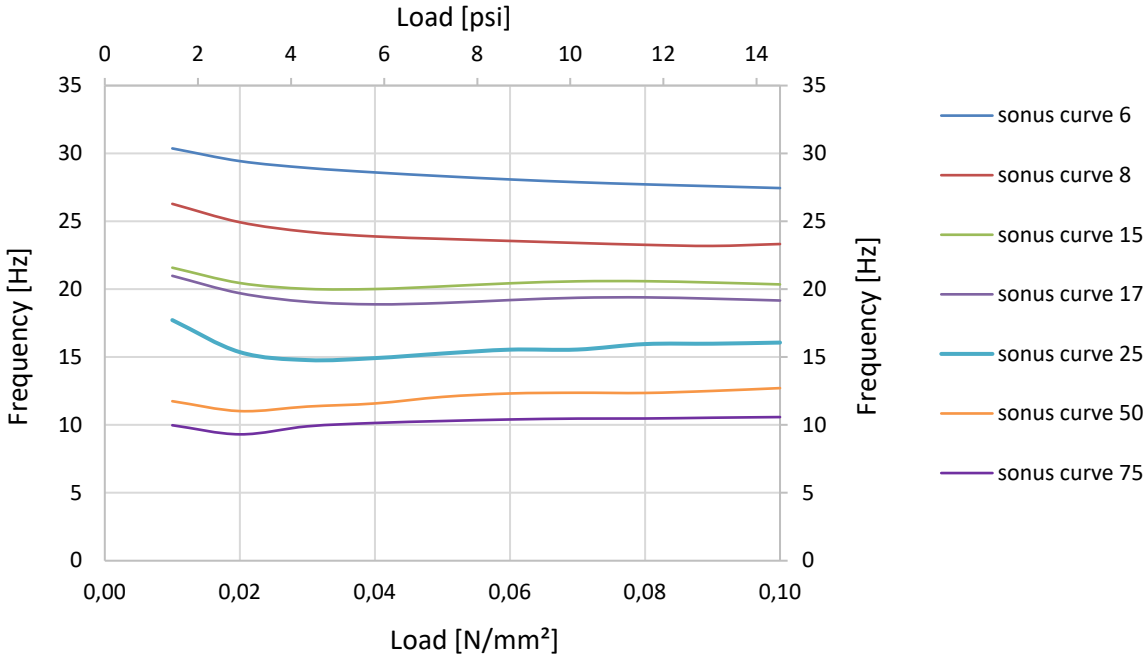

Test results as per test report 07-2019 conducted by Technical University of Dresden, Germany

Floor Assembly

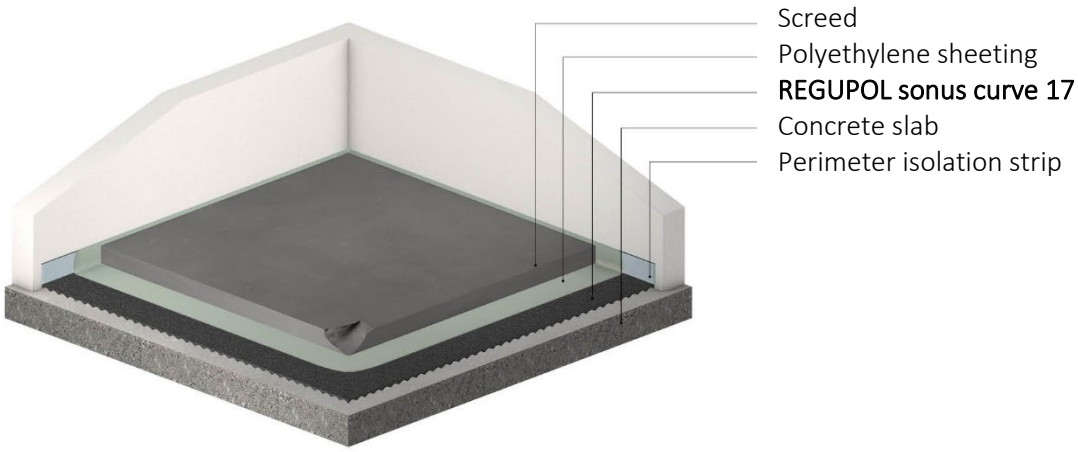

For more assemblies and acoustic test reports, please visit **www.regupol.com**.